



WiFi HANDLEIDING SOLIS

Je kan deze verbinding in orde maken onder deze voorwaarden:

- De omvormer moet in werking zijn (dus best overdag)
- Je moet in dezelfde ruimte staan als de omvormer
- Een smartphone of laptop wat Wi-Fi heeft

STAP 1: Ga naar de Wi-Fi instellingen van je smartphone

Maak verbinding met het AP_XXXX netwerk, deze cijfers moeten overeenkomen met de serienummer op de Wi-Fi dongle.

Wachtwoord: **12345678**





STAP 2: Open een webbrowser

Open een webbrowser op je smartphone (Chrome, Safari, Mozilla..)

Typ vanboven in de URL balk dit IP adres: **10.10.100.254**
(en druk vervolgens op enter)

Gebruikersnaam: **admin**

Wachtwoord: **admin**

Klik vervolgens onderaan op inloggen

The screenshot shows a mobile browser interface. At the top, the time is 09:45 and there are icons for signal strength, Wi-Fi, and battery. The browser's address bar contains the text 'Inloggen op website' and a share icon. Below the address bar, a dark grey modal window is displayed with the following content:

Inloggen

Voor <http://10.10.100.254> zijn een gebruikersnaam en een wachtwoord vereist. Je verbinding met deze site is niet beveiligd

Gebruikersnaam

Wachtwoord


Inloggen

Annuleren



STAP 3: Start de wizard

Links in het menu klik je op 'Wizard'

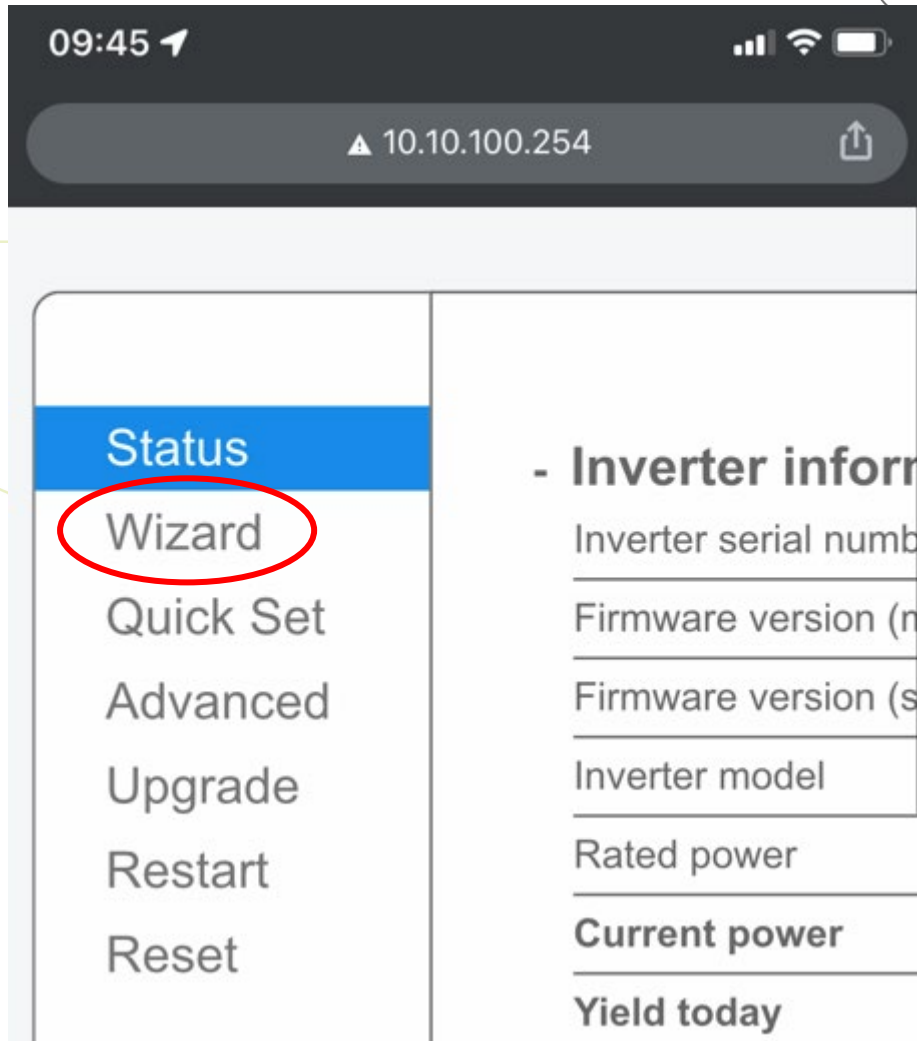



STAP 4: Selecteer jouw Wi-Fi netwerk

Selecteer het juiste netwerk (Proximus, Telenet etc..)

Klik vervolgens op NEXT

Status

Wizard

Quick Set

Advanced

Upgrade

Restart

Reset

Please select your current wireless network:

Site Survey

SSID	BSSID	RSSI	Channel
<input type="radio"/> G&D Energy IoT	92:CC:9C:9B:19:43	100	6
<input type="radio"/> G&D Energy Guest	8E:CC:9C:9B:19:43	100	6
<input type="radio"/> G&D Energy	86:CC:9C:9B:19:43	100	6
<input type="radio"/> G&D Energy IoT	92:CC:9C:94:4B:F2	76	6
<input type="radio"/> G&D Energy Guest	8E:CC:9C:94:4B:F2	76	6
<input type="radio"/> G&D Energy	86:CC:9C:94:4B:F2	74	6
<input type="radio"/> Huygen	60:38:E0:2F:43:99	47	10
<input type="radio"/> Proximus Public Wi-Fi	2E:79:D7:63:3A:97	40	1
<input type="radio"/> WiFi 2 4-2A90	2C:70:D7:63:3A:96	37	1

★Note: When RSSI of the selected WiFi network is lower than 15%, the connection may be unstable, please select other available network or shorten the distance between the device and router.

[Refresh](#)

Add wireless network manually:

Network name (SSID)
(Note: case sensitive)

Encryption method Disable

[Next](#)

1
2
3
4



STAP 5: Vul je wachtwoord in

Vul je wachtwoord in

Klik vervolgens op NEXT

09:46

10.10.100.254

Status

Wizard

Quick Set

Advanced

Upgrade

Restart

Reset

Please fill in the following information:

Password (8-64 bytes)
(Note: case sensitive)

••••••••

Show Password

Obtain an IP address
automatically

Enable

IP address

Subnet mask

Gateway address


DNS server address

Back Next

1 2 3 4

Web Ver:1.0.24

STAP 6: Klik op NEXT

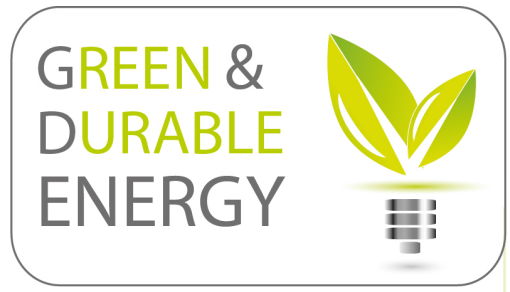

09:46

10.10.100.254

Status
Wizard
Quick Set
Advanced
Upgrade
Restart
Reset

Enhance Security

You can enhance your system security by choosing the following methods

Hide AP

Change the encryption mode for AP

Change the user name and password for Web server

Back **Next**

1 2 **3** 4

Web Ver:1.0.24


Ch: mo
If y
AP
ent
con

Ch:
anc
ser
If y
and
ser
ent
and
to tl



STAP 7: Klik op OK

De verbinding is in orde!

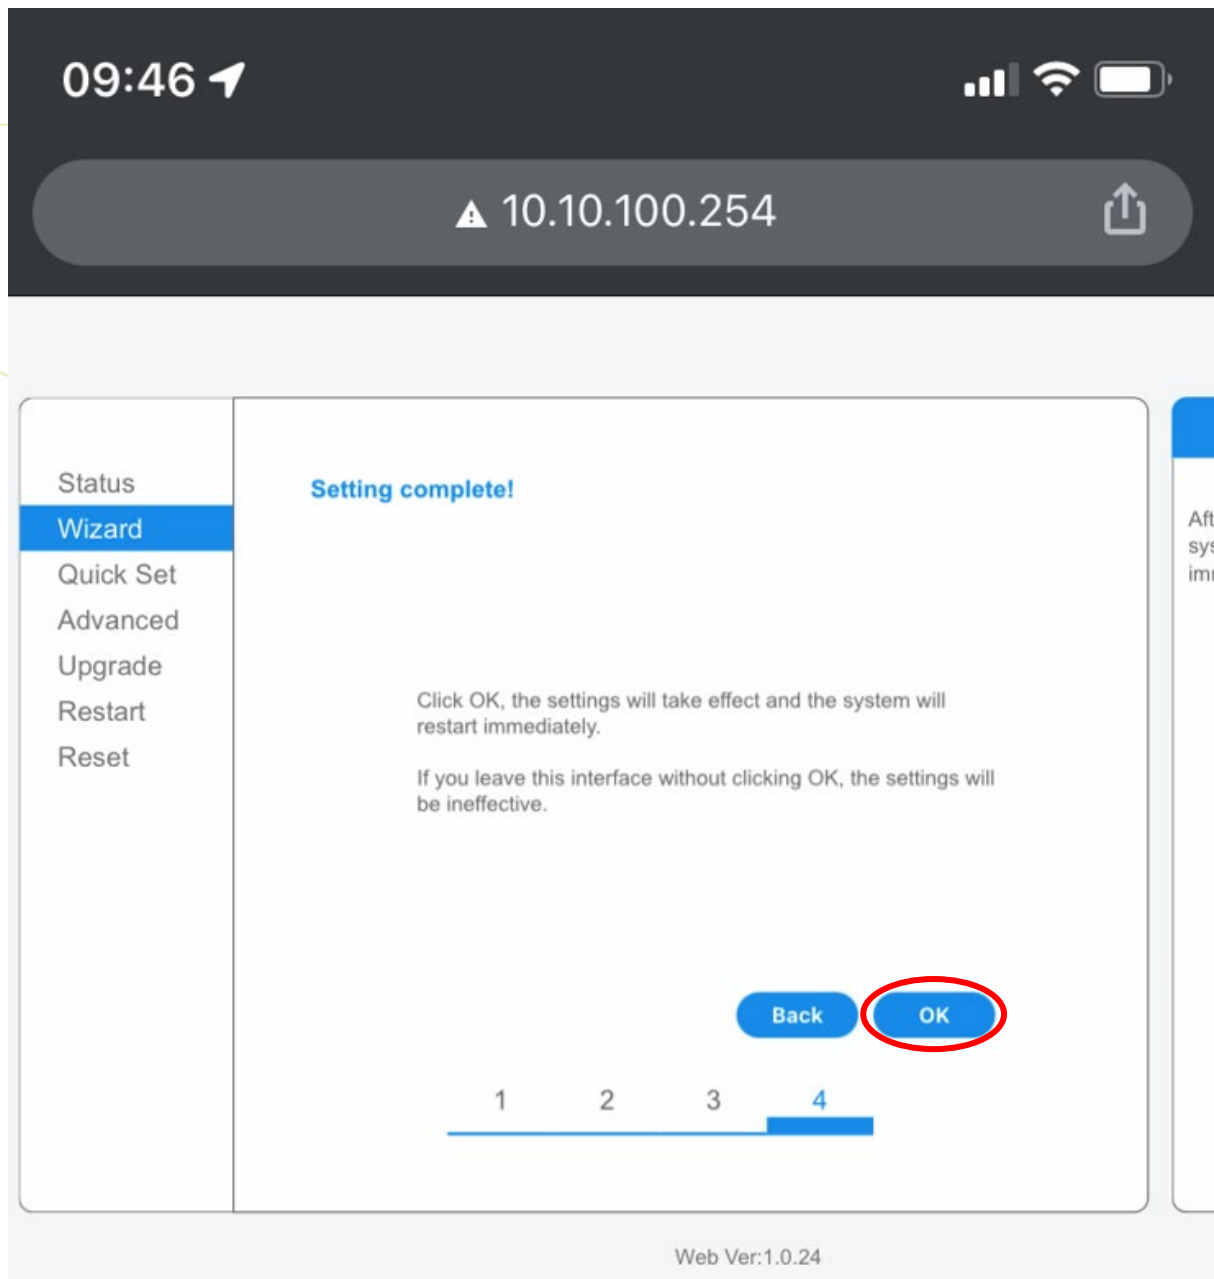

G&D Energy BVBA (Green & Durable Energy)

Maatschappelijke zetel: Bilzersteenweg 401, 3700 Tongeren - Magazijn: Kalkoven 8, 1820 Melsbroek
BE 0525.764.942 - RPR: Tongeren - KBC BE 74 7310 3082 0107 - BIC KREDBEBB

Contact: +32 (0)471 80 60 86 - info@gd-energy.be - www.gd-energy.be - www.gd-energy.nl